


VIOMI

Viomi Smart Kettle

Model: V-SK152A / V-SK152B

User Manual

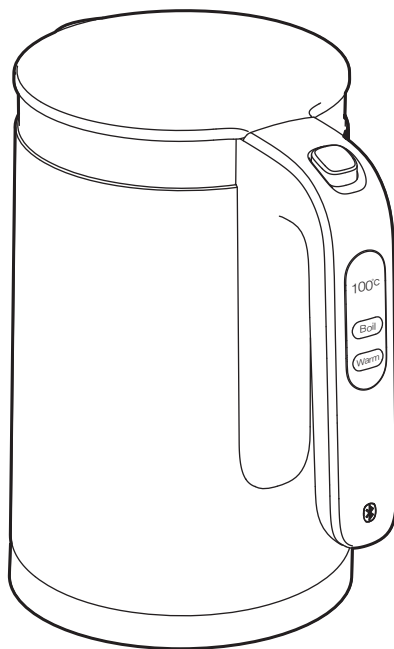

Please read the product manual before using and keep it for future use.

Safety Precautions

WARNING to reduce the risk of serious personal injury:

- * Before connecting the kettle to the power supply, check that the voltage indicated on the appliance (underside the kettle & base) corresponds with the voltage in your home.
- * Do not let the cord hang over edge of table counter or touch hot surface.
- * Do not place on or near a hot gas or electric burner or in a heated oven.
- * The attached base can not be used for other than intended use.
- * Do not move the unit while the kettle is switched on.
- * If the supply cord is damaged, it must be replaced by the manufacturer or its service agent or a similarly qualified person in order to avoid a hazard.

CAUTION to reduce the risk of personal injury or product property damage:

- * Unplug from the outlet when not in use.
- * Do not use the appliance for other than intended use.
- * Always take care to pour boiling water slowly and carefully without tipping the kettle too fast.
- * Always ensure the lid is closed and do not lift it while the water is boiling. Scalding may occur if the lid is removed during the brewing cycles.
- * Be careful when opening the lid for refilling when the kettle is hot.
- * Children should be supervised to ensure that they do not play with the appliance.


Warranty

VIOMI guarantees the consumer THE PERIOD OF 1 YEAR from the date of purchase. During this 1 year period, if you discover that any parts of the VIOMI electric kettle are damaged or broken, due to any manufacturing defects, we will replace the parts free of charge. Please contact your seller or any other VIOMI distributors if you need any other service or help.

For the First Use

If you are using the kettle for the first time, it is recommended that you clean your kettle before use by boiling a full kettle of water twice and then discarding the water.


Product Overview

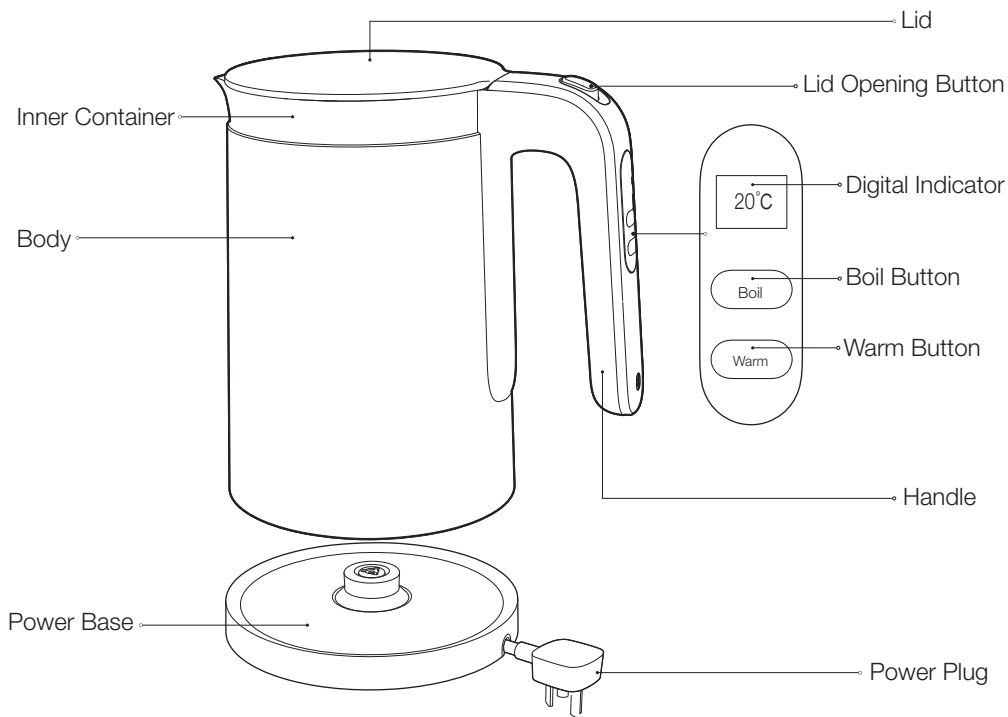


Specification

Name	Viomi Smart Kettle	Power	1800W	Capacity	1.5L
Model	V-SK152A	Voltage	220-240V~	Weight	1.3kg
Model	V-SK152B	Frequency	50/60Hz	Size	21.6x14.5x23.5cm

Operation

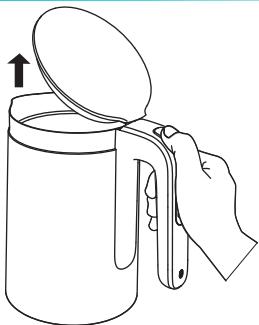


- 1** To fill water into the kettle, remove it from the power base and open the lid by press down the lid opening button, fill with the desired amount of water to the kettle. Always fill the kettle between the minimum (0.5L) and maximum (1.5L) marks. Too little water will result in the kettle switching off before the water has boiled.

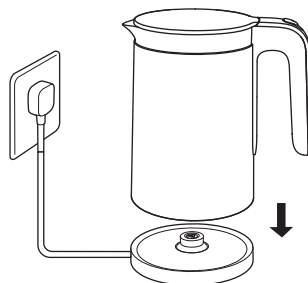


- 2** Close the lid. Position the kettle on the power base in place. Make sure the kettle contact with the power base completely. Then the indicator light will turn on to show the current water temperature.



Do not fill the water over the maximum level, as water may spill out of the spout when boiling. Ensure that the lid is firmly in place before connecting the power cord to the outlet.




- 3** Press “Boil” or “Warm” button according to your requirements.



- 4** Boiling Mode, the indicator number will increase until the water temperature go up to 100°C. The indicator will turn off after a few minutes without any action.

Warm Mode

The orange light will turn on all the time after you press the warm button, the kettle will heating automatically when the temperature is lower than the setting temperature.



- ① There are 4 modes(50°C, 70°C, 80°C, 90°C) were designed in the kettle, choose the mode you need by press the warm button intermittent.
- ② The kettle will begin to heat after press the warm button, it will stop heating until 100°C.
- ③ Then the temperature will begin to reduce slowly, the kettle will reheat when the temperature is lower than the setting temperature.




- Default temperature is 50°C, keep warm function will last 12 hours.
- The indicator number will flash after the warm button was pushed, it will stop flashing with no operation in 2 seconds which means the current warm mode was set.
- Long press the warm button for 3 seconds to stop warming.

Boil-Dry Protection


You should accidentally allow the kettle to operate without water, the boil-dry protection will automatically switch it off. If this should occur, allow the kettle to cool before filling with cold water and re-boiling.

- ◆ Always disconnect the appliance from the power outlet and leave it to cool down completely before cleaning.
- ◆ Never immerse the kettle in water, or allow moisture to contact with these parts.


► Removal of Mineral Deposits

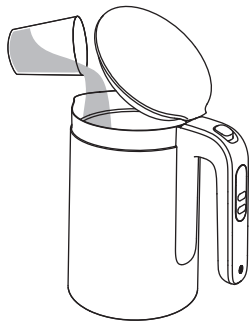


- ❶ Pour 0.5L white vinegar into the kettle and soak it more than 1 hour. Do not boil.

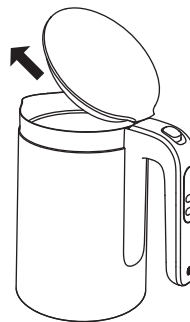

- ❷ Discard the white vinegar and use wet cloth to clean inside.

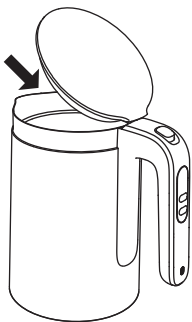

- ❸ Fill water to boiling and discard it, clean it for 4-5 times with tap water.

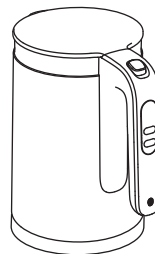

- ❹ Use dry cloth to clean outside of the kettle, store it in dry condition.

Problem	Cause	Solution
Indicator not work	Power base not connect properly	Check power base
	Power plug not connect properly	Check power plug
	Power plug was damaged	Contact seller for help
Not heating	Power base not connect properly	Check power base
	Power base or kettle was broken	Contact seller for help

Quick Setup

Control your device and interact it with other smart home devices in Mi Home app.

- 1 Install Mi Home app
Scan the QR code or go to app store to download and install Mi Home app.



- 2 Add a device
Open Mi Home app, tap "+" on the upper right, and then follow prompts to add your device.

Note: The version of Mi Home app might have been updated, please follow the instructions based on the current app version.

This product will upgrade version to add features and improve user experience. Please upgrade in time.
Note: Simultaneously press and hold "Boil" and "Warm" buttons for 3 seconds to restore factory settings.

VIOMI

www.viomi.com